

PRODUCT INFORMATION PACKET



Model No: 056T17G5315

Catalog No: G829

Explosion Proof Motor, 0.50 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 56C Frame, EPFC

Operational at 208-230/460 V @60HZ



Regal and LEESON are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2025 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Phase	3	Output HP	0.50 Hp
Output KW	0.37 kW	Voltage	230/460 V
Speed	1725 rpm	Service Factor	1.00
Frame	56C	Enclosure	Explosion Proof Fan cooled
Thermal Protection	Automatic	Efficiency	68 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	2.4/1.2 A	Power Factor	61.1
Duty	Continuous	Insulation Class	B
Design Code	B	KVA Code	M
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203
UL	UL Listed And CSA Certified	CSA	Y
CE	N	IP Code	54
Number of Speeds	1	Hazardous Location	DIV 1 EXP PROOF CL I GR CD CL II GR FG T3B

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	40 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	NEMA 56	Overall Length	13.94 in
Frame Length	6.81 in	Shaft Diameter	0.625 in
Shaft Extension	2.06 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	B-104188-681	Connection Drawing	A-EE7335

NAMEPLATES TO BE READ FROM SHAFT EXT. END.

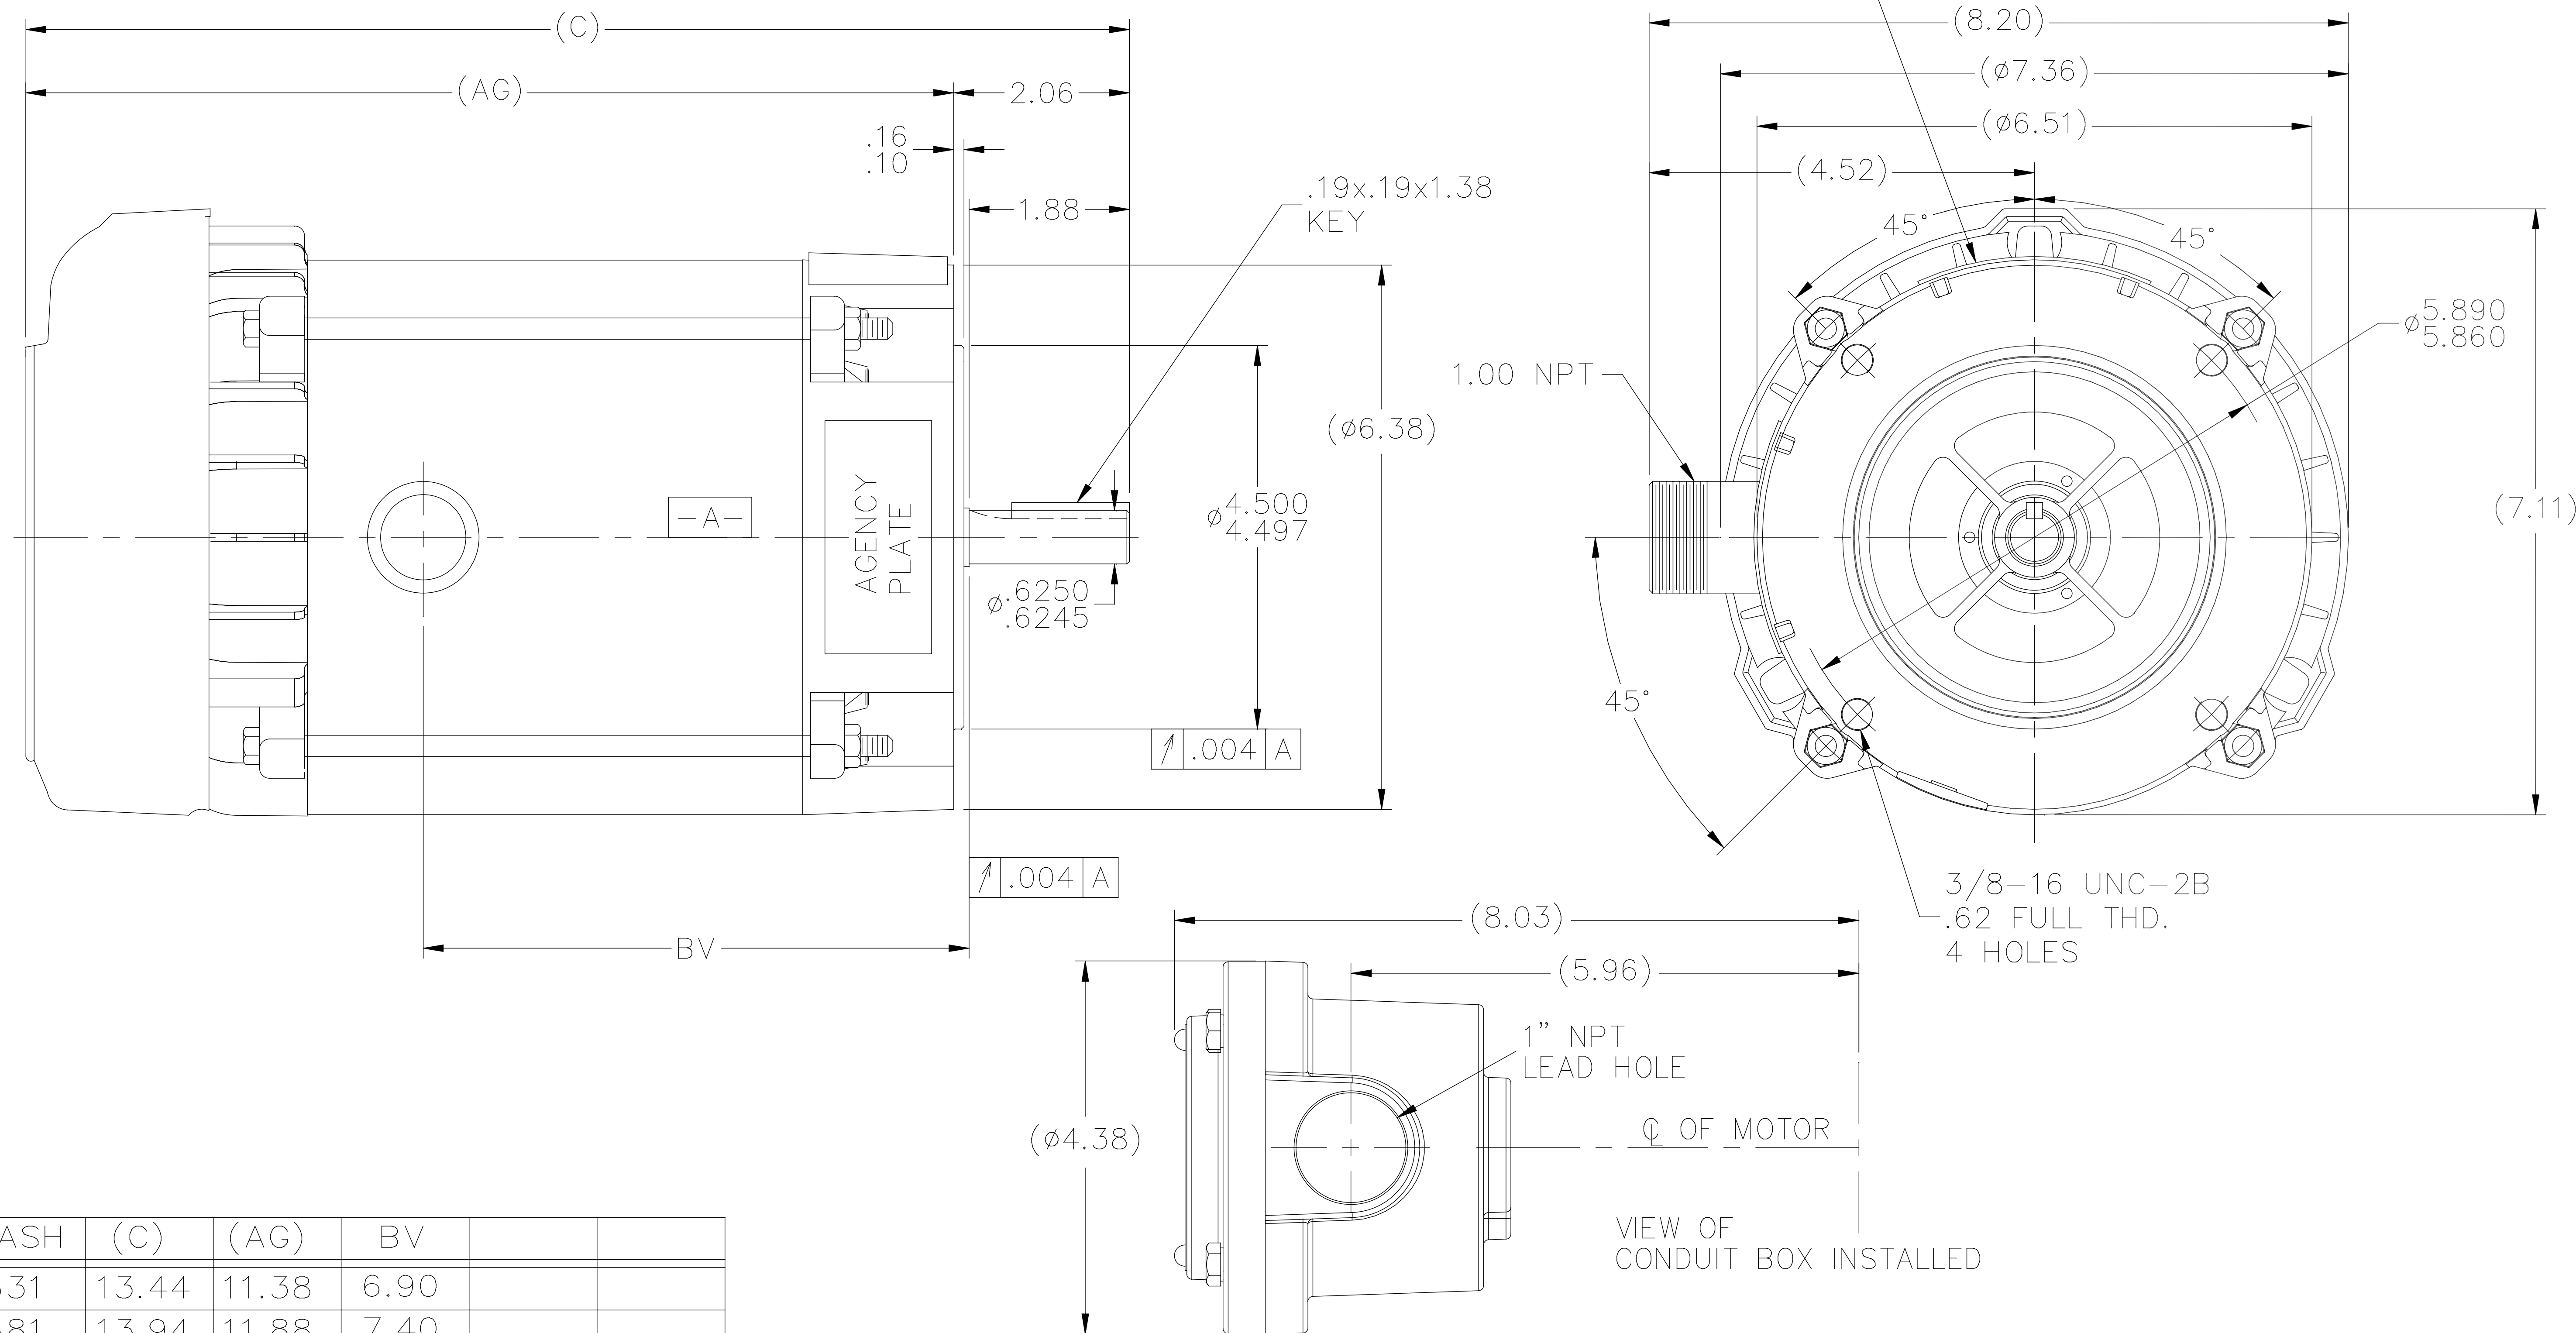


DASH	(C)	(AG)	BV		
631	13.44	11.38	6.90		
681	13.94	11.88	7.40		
731	14.44	12.38	7.90		
781	14.94	12.88	8.40		
831	15.44	13.38	8.90		
881	15.94	13.88	9.40		
931	16.44	14.38	9.90		
981	16.94	14.88	10.40		


NO.	REVISION	BY & DATE	CHK	ANG	FINISH	TOLERANCES UNLESS SPECIFIED		REGAL™ Regal Beloit America, Inc.	DRAWN MH 11-21-1996		
						DEC.	INCHES				
6		SL 09/15/15							CHK ML 11-25-1996		
5	COND. BOX INSTALLED VIEW UPDATED PER ECR-0044571	UD 10/10/13	ST						APPD GK 12-02-1996		
4	REVISED C'BOX PER CN40784A	JJB 02/23/2007	ML	.X	±.1				SCALE 17=32		
3	REDRAWN IN AUTOCAD	TAT 06-28-2004	ML	.XX	±.03			TITLE OUTLINE - 'C' FACE	REF		
2	ADDED CONDUIT BOX VIEW CN 26686	MRB 03-22-1999		.XXX	±.005			56C/145TCZ FR - EXP PR.			
1	NEW DRAWING CN 23099	MH 12-02-1996	SM	.XXXX	±.0005			MAT'L.	FMF		
					±.7'30"				PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT						RFP	CAD FILE 104188	SIZE B	DRAWING NO. 104188	PAGE OF 6	REV. 6
						DIST WP					

EE7335


HIGH VOLTAGE CONNECTIONS

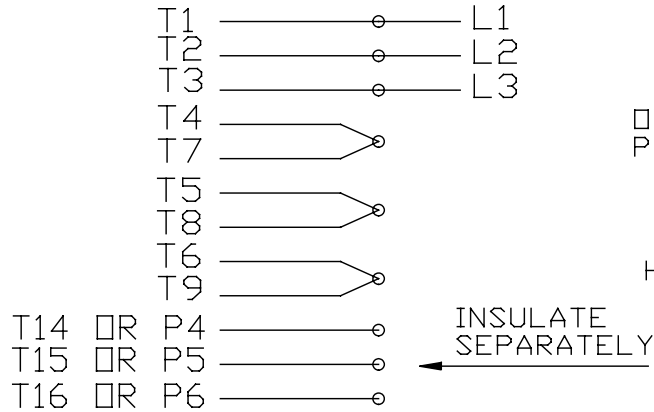


LOW VOLTAGE CONNECTIONS

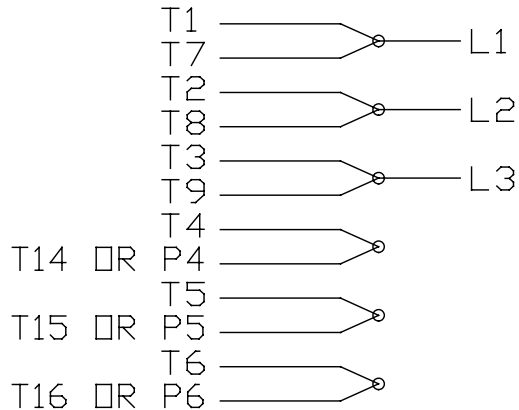

THREE PHASE - DUAL VOLTAGE MOTOR WITH OVERLOAD PROTECTOR



NOTE:
ACTUAL PROTECTORS
TERMINAL LOCATIONS
FOR LEAD CONNECTIONS

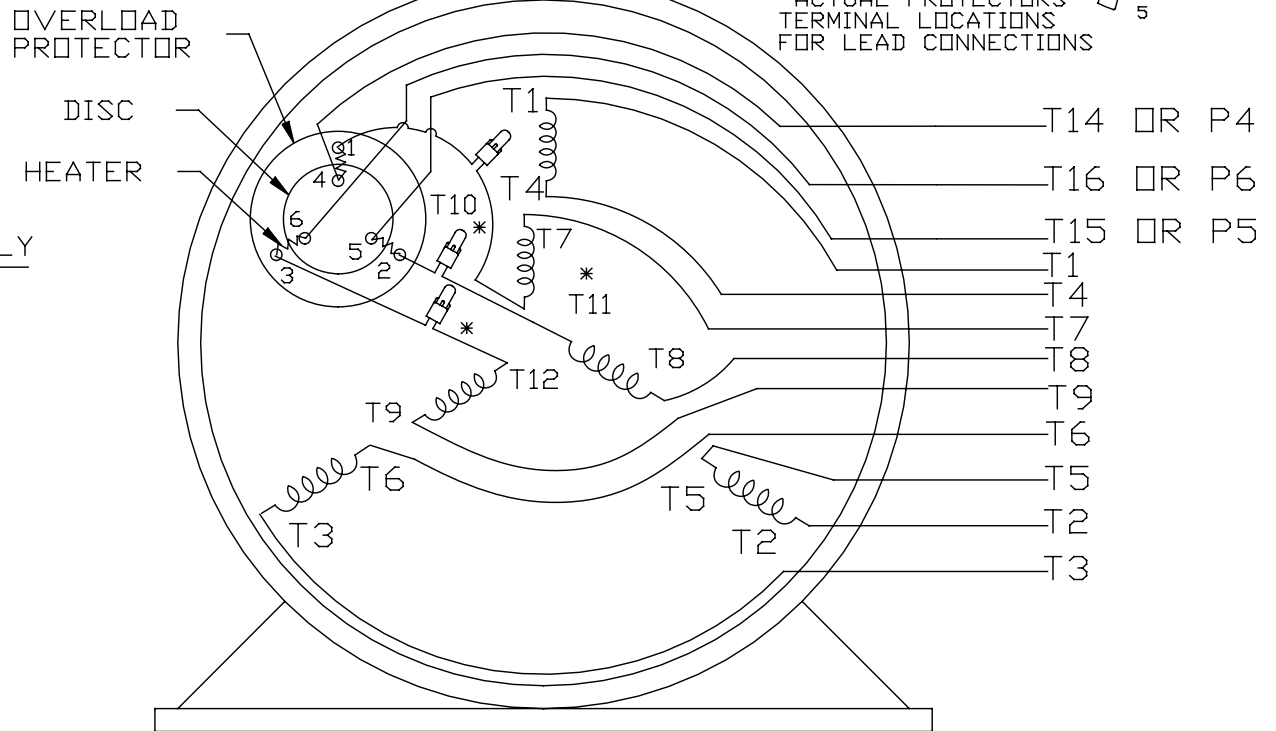

VIEW OF TERMINAL END

* USE PRESSURE CONNECTORS FOR MT2 PLANT ONLY

T2K
T4D
T6AN

NO.	REVISION	BY & DATE	CHK	TOLERANCES UNLESS SPECIFIED		FINISH	DRAWN	SCALE	REV.	
				DEC.	INCHES					
17	CHANGED LOGO FROM MARATHON TO REGAL	KIR 02/16/16	AB	DEC.	INCHES	Regal Beloit America, Inc.	KL	08-09-1993	1	
16	PRESSURE CONNECTORS QUANTITY WAS 6	PVR 10/29/13	GR	.X	±.1		CHK	ML	08/10/1993	2
15	PRESSURE CONNECTORS ADDED	GR 03/04/13	SR	.XX	±.01		APPD	GK	08/10/1993	3
14	ADDED ACTUAL PROCECTOR VIEW CN 17481	KL 05/18/94		.XXX	±.005	TITLE			4	
13	REDRAWN IN AUTO CAD	KL 08/11/93		.XXXX	±.0005	CONNECTION DIAGRAM			5	
						3Ø-DUAL VOLT WITH OVERLOAD PROTECTO			6	
						MAT'L.			7	
									8	
									9	
									10	
									11	
									12	
									13	
									14	
									15	
									16	
									17	
									18	
									19	
									20	
									21	
									22	
									23	
									24	
									25	
									26	
									27	
									28	
									29	
									30	
									31	
									32	
									33	
									34	
									35	
									36	
									37	
									38	
									39	
									40	
									41	
									42	
									43	
									44	
									45	
									46	
									47	
									48	
									49	
									50	
									51	
									52	
									53	
									54	
									55	
									56	
									57	
									58	
									59	
									60	
									61	
									62	
									63	
									64	
									65	
									66	
									67	
									68	
									69	
									70	
									71	
									72	
									73	
									74	
									75	
									76	
									77	
									78	
									79	
									80	
									81	
									82	
									83	
									84	
									85	
									86	
									87	
									88	
									89	
									90	
									91	
									92	
									93	
									94	
									95	
									96	
									97	
									98	
									99	
									100	

Data Sheet

Date: 1/2/2019
 Customer: _____
 Attention: _____
 Submitted by: FAREEDA DUDEKULA



56T17G5315

Submittal

Data @ 460 V

Motor Load Data


Load	0%	25%	50%	75%	100%	115%	125%	LR
Current (Amps)	0.92	0.94	0.98	1.00	1.20	1.25	1.30	7.0
Torque (ft-lb)	0.00	0.37	0.74	1.10	1.50	1.80	2.00	6.2
RPM	1800	1785	1775	1750	1725	1,722	1720	0
Efficiency (%)		48.0	63.5	65.5	68.0	70.0	72.5	
P.F. (%)	14.0	26.0	38.0	48.5	61.1	63.0	65.0	82.0

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle
Speed (RPM)	0	500	1150	1725	1800
Current (Amps)	7.0	6.5	4.8	1.20	0.92
Torque (ft-lb)	6.2	6.2	7.2	1.50	0.00

Information Block

HP	0.5			
Sync. RPM	1800			
Frame	56			
Enclosure	EPFC			
Construction	TSE			
Voltage	208-230/460 V			
Frequency	60 Hz			
Design	B			
LR Code letter	M			
Service Factor	1			
Temp Rise @ FL	45 °C			
Duty	CONT			
Ambient	40 °C			
Elevation	3300 feet			
Rotor/Shaft wk ²	0.05 Lb-Ft ²			
Ref Wdg	ZT408 R8			
Sound Pressure @ 1M	62 dBA			
VFD Rating	NONE			
Outline Dwg	B-104188-681			
Conn. Diag	A-EE7335			
Additional Specifications:				
0				
0				
EQUIV CKT (OHMS / PHASE)				
R1	R2	X1	X2	Xm
0.0000	0.0000	0.0000	0.0000	0.0000

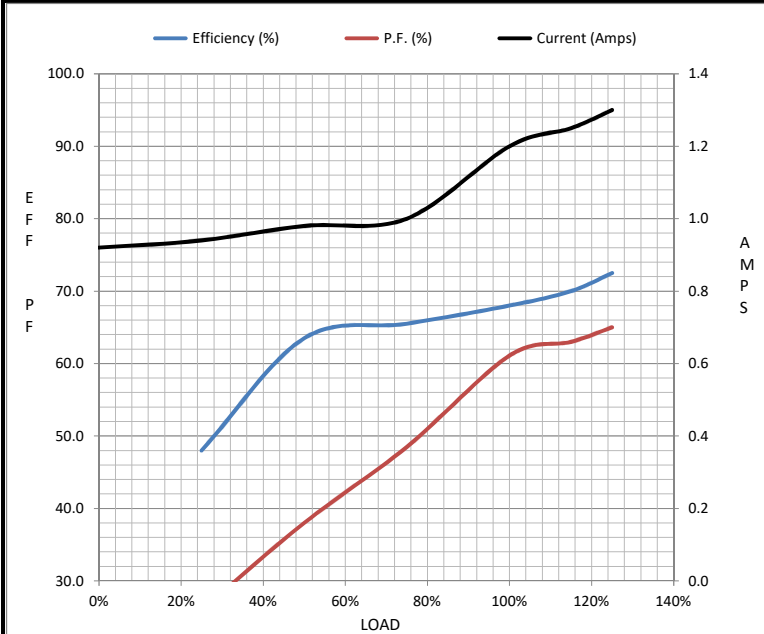

Speed - Torque Curve

